

# KCIC-5B2N21M

5MP IPC 2.7-13mm MZ Lens IR Bullet Camera

## Features


- 5 Mega pixel 1/2.8" SONY STARVIS CMOS image sensor
- 2.7~13.5mm Megapixel Smart Focus Lens (Motorized Zoc)
- Long-range, less heat (4 x Hi-power Chip leds)
- Privacy Masking up to 8 areas
- Easy Quick Installation
- Support ONVIF
- IP67 Ratings
- Made in Korea



## Specification

|                   |                                                      |
|-------------------|------------------------------------------------------|
| Image Sensor      | Sony STARVIS 5.69Mega Pixels Image Sensor            |
| Size              | 1/2.8 inch                                           |
| Scan System       | Progressive Scan                                     |
| Total Pixels      | 2704(H) x 2104(V), 5.69 Mega Pixels                  |
| Effective Pixels  | 2616(H) x 1964(V), 5.14 Mega pixels                  |
| Day & Night       | Auto / Day (Color) / Night (BW), ICR Control         |
| Privacy Area      | On / Off (8 Programmable Zones)                      |
| Motion Detection  | 432 Zone, Sensitivity 1~5 Step, On / Off             |
| WDR               | Real WDR On / Off (Adjust)                           |
| DNR               | 2DNR, 3DNR, On / Off (Adjust)                        |
| SLDC              | Simple Lens Distortion Correction, On / Off          |
| Defog             | Detects Foggy, On / Off (Adjust)                     |
| Elec. Shutter     | Auto(1/20~1/30000), Suppress Rolling, Manual         |
| Color Adjust      | Bright / Contrast / Satuation / Sharp / Hue          |
| White Balance     | Auto / User                                          |
| OSD Display       | Text, Date, Time, Event, On / Off                    |
| Image Mirror      | Normal / Mirror (H) / Flip(V) / Both (HV)            |
| Power Supply      | DC12V $\pm$ 10%                                      |
| Current           | Max 350(mA)                                          |
| Operating Temp    | 0°C ~ +50°C                                          |
| Preservation Temp | -10°C ~ +60°C                                        |
| Humidity          | 0% ~ 95%                                             |
| Dimension         | 92.5 mm (W) $\times$ 85.5 mm (H) $\times$ 312 mm (D) |
| Weight            | 750g                                                 |

## Dimension

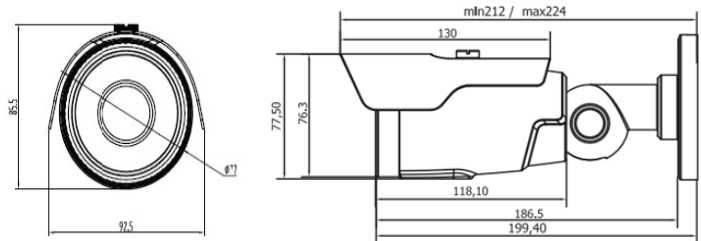

## Network

|         |                 |                                                                                              |
|---------|-----------------|----------------------------------------------------------------------------------------------|
| Network | OS              | Embedded Linux                                                                               |
|         | Interface       | RJ45 10/100 Base-T PoE                                                                       |
|         | Protocol        | TCP/IP, UDP/IP, RTP, RTSP, RTCP, NTP<br>HTTP, DHCP, FTP, SMTP, DNS, DDNS                     |
|         | Onvif           | Ver 19.12                                                                                    |
| Video   | Compress Format | H.265 / H.264 / MJPEG                                                                        |
|         | Resolution      | 2560x1920 / 2560x1440 / 2048x1536 /<br>1920x1080 / 1280x720 / 640x480 /<br>640x360 / 320x240 |
|         | Max. Frame Rate | 30fps @ all resolution                                                                       |
|         | Video Quality   | H.265 : Bitrate Control<br>H.264 : Bitrate Control<br>MJPEG : Quality Level Control          |
|         | Streaming       | Triple Stream (Stream 1,2,3)<br>RTP / RTSP, Unicast RTP, Multicast RTP                       |
| Audio   | Compress Format | G.711u-law                                                                                   |
|         | Streaming       | Two way                                                                                      |